


Perfect Vision

Forklift Camera Solutions PWAS








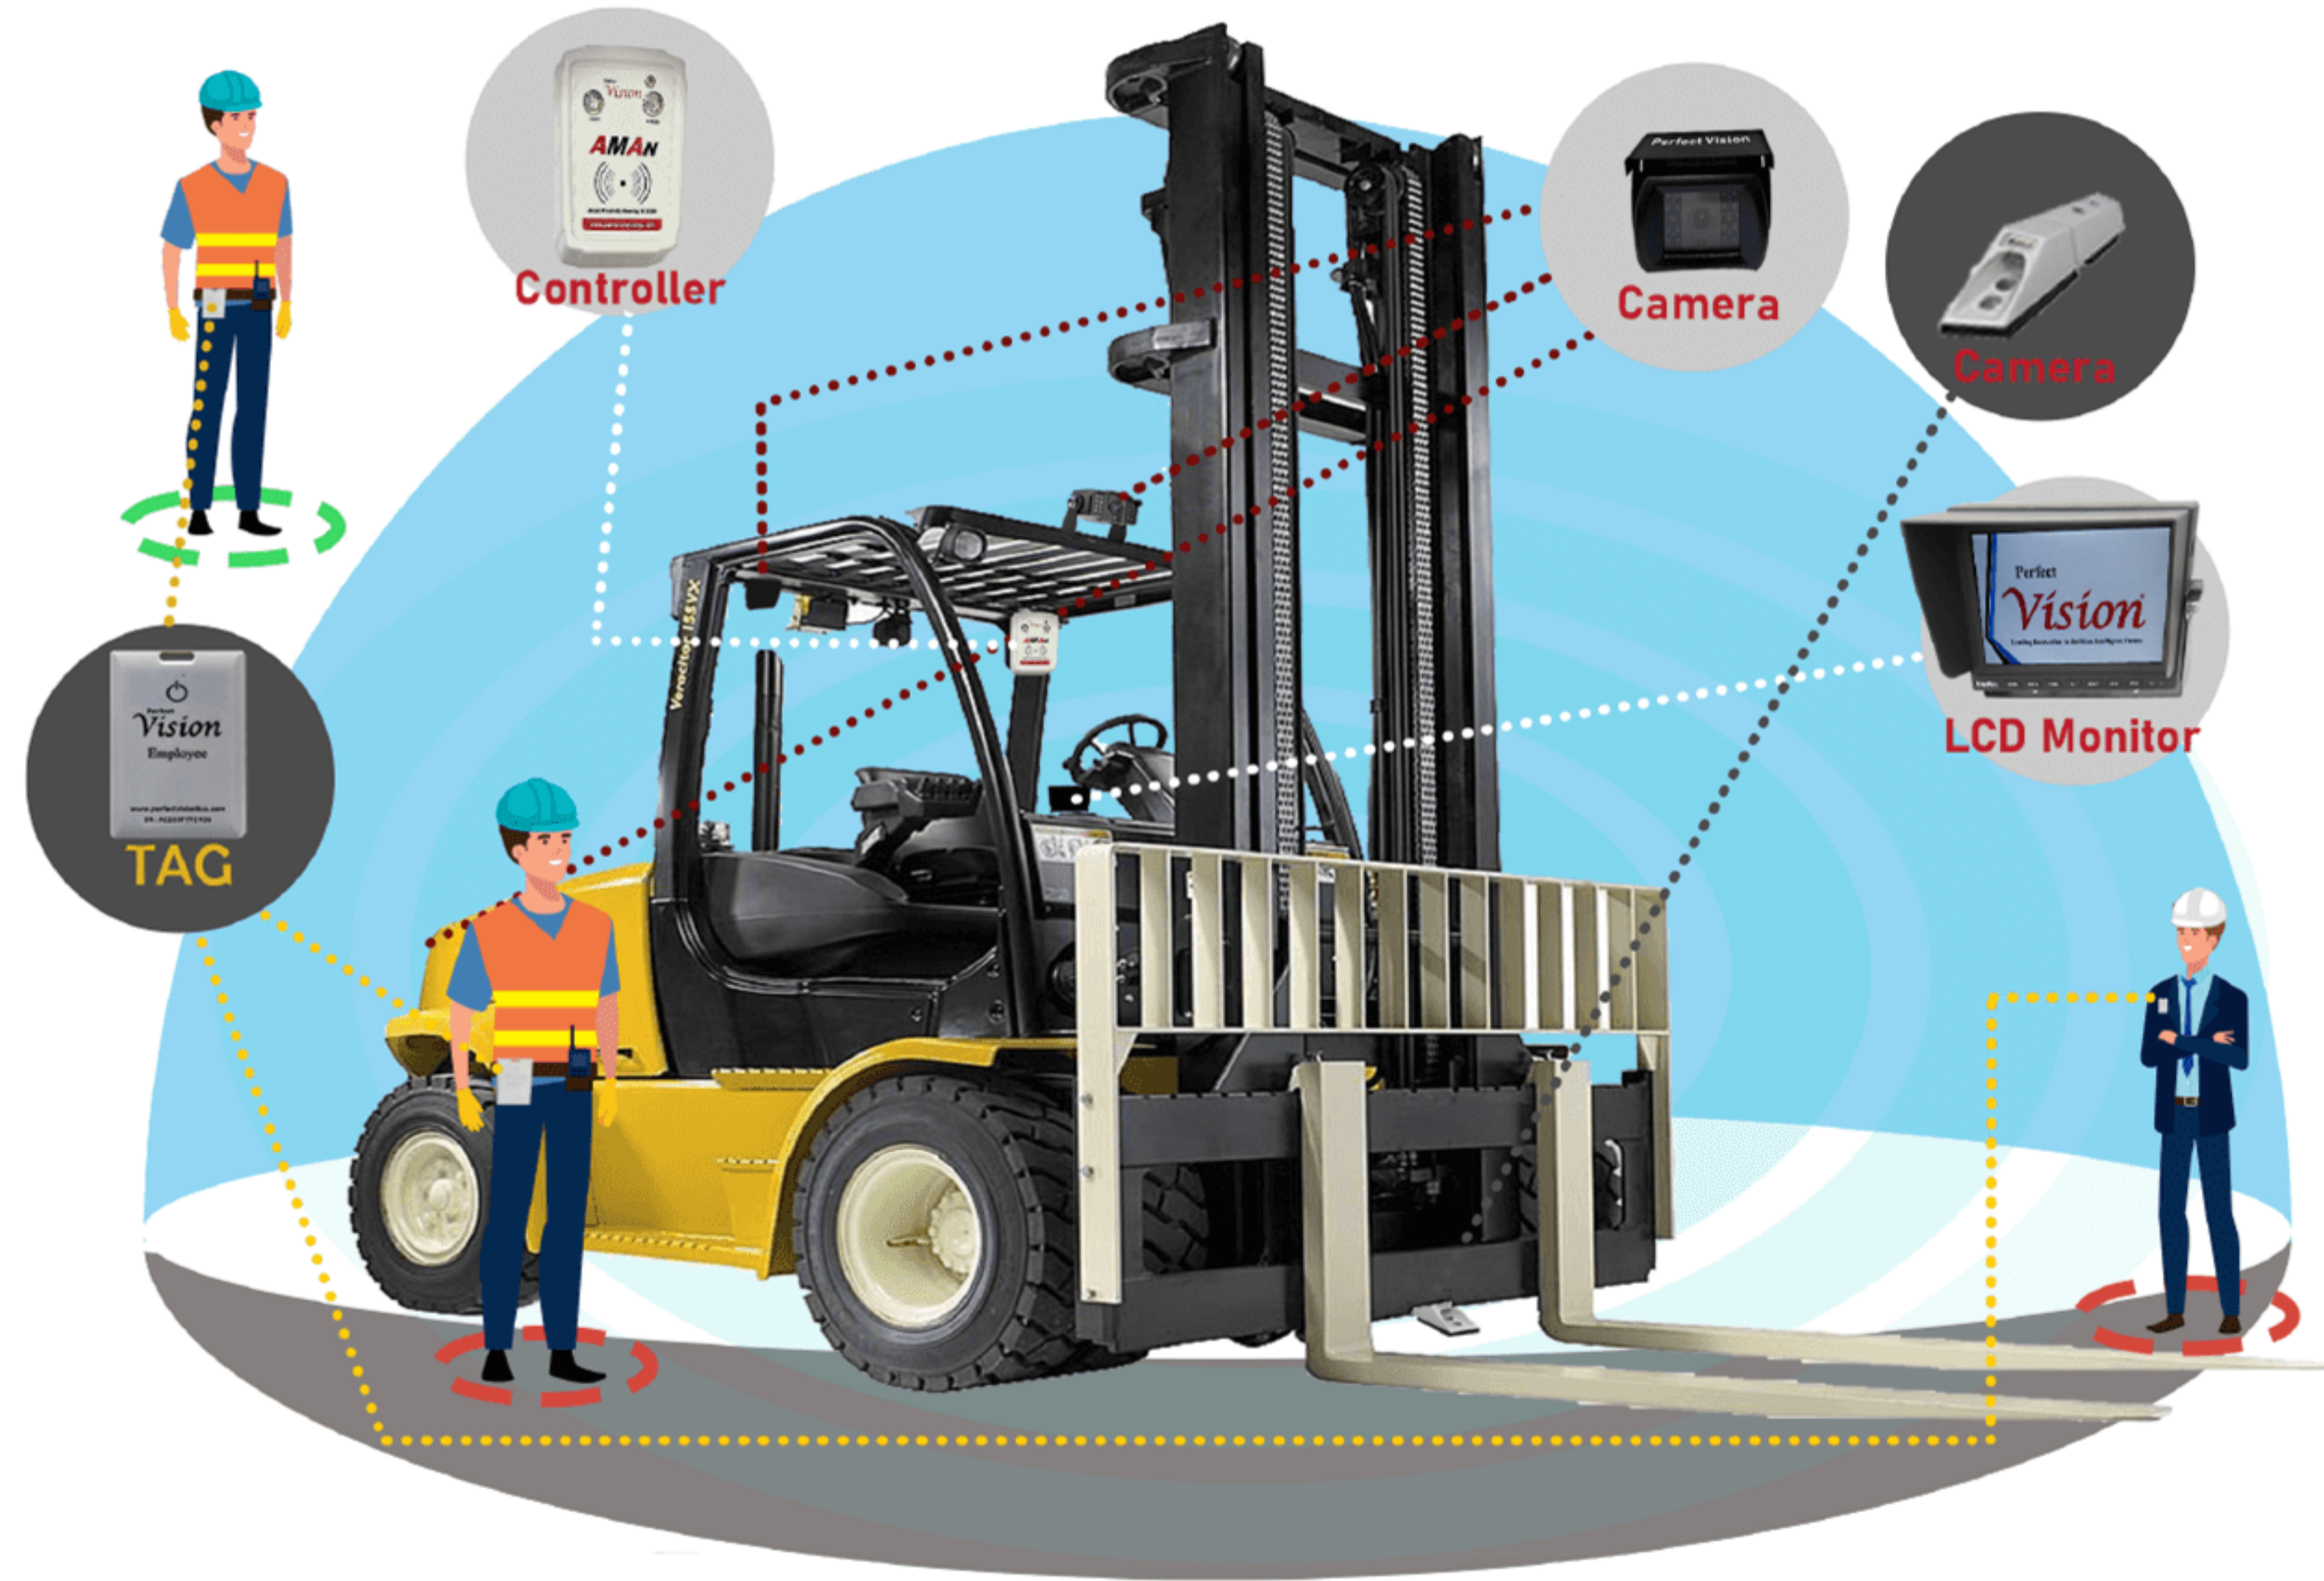


Functionality Description:

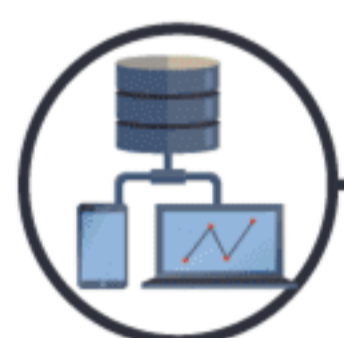



The system is based on a 2.4Ghz RF spectrum when the tag is present in the detection range It will detect the tag value saved to the data logger with a timestamp. The system is capable to detect multiple tags at the same time and alert the operator.



Device Features & Specifications:

-  Data logger with 1 Million Event Record
-  SBC based integrated System
-  360 Degree Area Coverage
-  Controlled Beam Pattern

-  Detection Range (7m)
-  USB Slot for easy access of data
-  Mobile Application for Range Update and Data Download
-  Power Input (12VDC to 60VDC)

-  IP68 Robust Covering with operating Temperature of 90 Degree C
-  Forklift Cameras
-  10-inch AHD Quad LCD Monitor
-  Equipment Assigned Tag (optional)